



making the WORLD A SAFER PLACE

FIRE ALARM SYSTEM

ECG 983 SERIES GAS DETECTOR



Shown with base

SPECIFICATIONS

- * Detector Sensitivity: Less than 1/4 LEL of natural gas
- * Sensitivity Test Feature: Automatic Sensitivity
- * Detection Range: 100 square meters rating
- * Alarm Indicator: LED Continuously emitting red light
- * Temperature range: -10°C to 50°C
- * Output voltage : Relay Output
- * Humidity: 0 to 95% RH, noncondensing
- * Alarm Contact: For 4-wire N/O or N/C Operation
Form A: 1.0A at 30VDC or 0.5A at 125VAC
- * Dimensions: 10mm (dia) x 46mm (ht) with base
- * Weight: 130g/set with base
- * Rated Voltage:

+ MODEL: ECG-983N:	12.0 ~ 24.0 VDC
+ MODEL: ECG-983L:	12.2 ~ 24.8 VDC
- Type of gas sensed: **ECG-983N:** Natural (LNG)
ECG-983L: Propane (LPG)



APPLICATIONS

ECG-983 series

gas detectors have sleek modern look, they are lightweight and easy-to-use, yet powerful, dependable and accurate. ECG-983 gas detectors help to identify potentially dangerous situation when methane, propane or butane gas

STANDARD FEATURES

- * Advanced detection of Methane, Propane and Butane gas leakage in the premises
- * Japanese FIGARO low maintenance solid state gas sensor
- * Durable sensor head; excellent gas access
- * Works with any building automation system or other control device
- * Built-in local sounder; alarm level reaches 70 dB
- * Easy installation and maintenance
- * Low-profile solid housing design
- * Five-year limited warranty
- * N/C (normal/close)-N/O (normal/open) selectable relay output
- * Remote LED

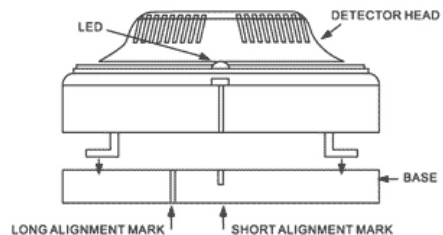

EN-54



EVERDAY TECHNOLOGY CO., LTD

No 8, Lane 492, Ba-Der street, Shulin 238 Taipei Hsien, Taiwan 238, R.O.C

TEL:886-2-2668-9668

Fax: 886-2-2668-9666

Web: www.everday.com